


BJ600


联结杆

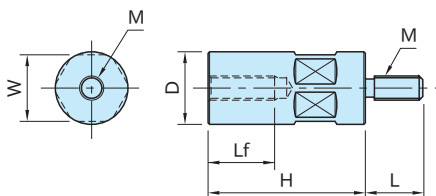

类型	本体
BJ600 -08	SCM435 淬火回火 四氧化三铁膜
BJ600 -12	S45C
BJ600 -16	四氧化三铁膜

型号	M	H	L	Lf	D	W	质量 (g)
BJ600-08032	M 8×1.25	32	19	20	24	22	105
BJ600-08040		40					135
BJ600-08050		50					170
BJ600-08065		65					220
BJ600-12050	M12×1.75	50	30	35	40	36	480
BJ600-12065		65					640
BJ600-12080		80					740
BJ600-12100		100					940
BJ600-12125		125					1230
BJ600-12160		160					1570
BJ600-12200	200	1970					
BJ600-16050	M16×2	50	30	35	50	46	770
BJ600-16065		65					1000
BJ600-16080		80					1160
BJ600-16100		100					1470
BJ600-16125		125			1920	60	55
BJ600-16160		160			3490		
BJ600-16200		200			4370		

使用示例及使用方法

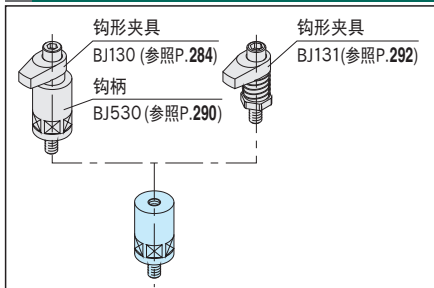

请在增加夹紧高度时使用。