



BJ330

螺旋式千斤顶

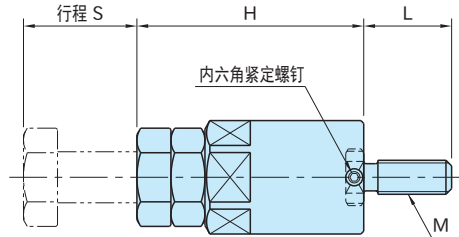

本体	螺栓
S45C 四氧化三铁膜	SCM435 淬火回火 四氧化三铁膜



型 号	H	S	W	D	W ₁	M	L	容许载荷 (kN)	质量 (g)
BJ330-12040	40	10	30	40	36	M12×1.75	30	31.8	350
BJ330-12050	50	20							420
BJ330-12070	70	40							570
BJ330-12100	100	50	36	50	46		M16×2	30	1350
BJ330-12150	150	100							2100
BJ330-16040	40	10	30	40	36				M16×2
BJ330-16050	50	20				430			
BJ330-16070	70	40				580			
BJ330-16100	100	50	36	50	46	M16×2		30	
BJ330-16150	150	100					2110		

特 点

- 请根据工件形状与 **BJ333** 螺旋式千斤顶用垫片配合使用。(参照P. 449)
- 通过拆除底面的用于固定的螺栓，可自由调节安装位置。

使用示例及使用方法

