

# BJ201-T


## 可调式尖型侧面限位器(T形槽用)





(黑皮面用)




(基准面用)

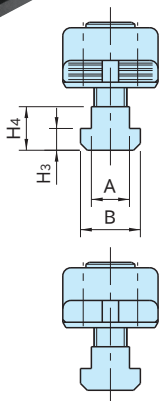

本体	夹口	T形槽螺母	内六角螺栓
SCM440 四氧化三铁膜	SCM440 淬火回火 四氧化三铁膜 精密研磨(基准面用)	S45C 四氧化三铁膜	SCM435 四氧化三铁膜

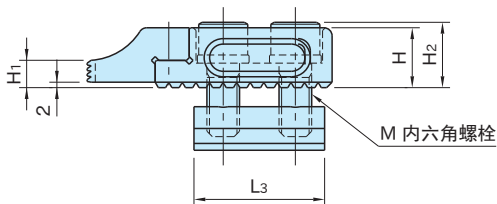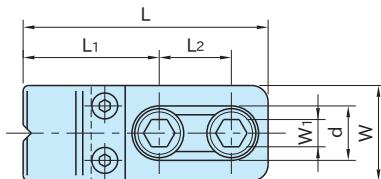

(黑皮面用)



(基准面用)

类型	型 号	W	H <sub>1</sub>	L <sub>1</sub>	L <sub>2</sub>	L	A	B	H <sub>3</sub>	H <sub>4</sub>	L <sub>3</sub>	d	M
黑皮面用	BJ201-12022T	35	10	50	26.5	90	14	22	8	16	48	20	M12×1.75-35L
	BJ201-16030T	40	14	67.5	30	115	18	28	10	20	55	26	M16×2 -45L
基准面用	BJ201-12122T	35	10	50	26.5	90	14	22	8	16	48	20	M12×1.75-35L
	BJ201-16130T	40	14	67.5	30	115	18	28	10	20	55	26	M16×2 -45L

类型	型 号	W <sub>1</sub>	H	H <sub>2</sub>	承载能力 (kN)	容许紧固扭矩 (N·m)	质量 (g)
黑皮面用	BJ201-12022T	10	22	25.5	7.4	90	500
	BJ201-16030T	14	30	34.5	11.7	150	1050
基准面用	BJ201-12122T	10	22	25.5	7.4	90	500
	BJ201-16130T	14	30	34.5	11.7	150	1050