


BJ745

双头螺栓



BJ745-08~20

BJ745-24

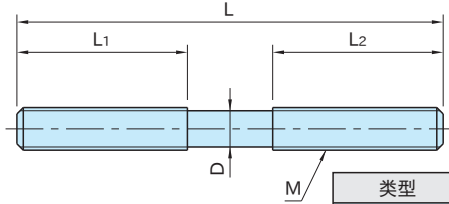

类型	本体
BJ745-08~20	SCM435 淬火回火 四氧化三铁膜 HRC33~39
BJ745-24	钢铁 淬火回火 四氧化三铁膜 HRC23~34

型号	M	L	L ₁	L ₂	D	质量 (g)
BJ745-08050	M 8×1.25	50	20	20	7.1	20
BJ745-08063		63	25	25		25
BJ745-08080		80	32	32		35
BJ745-08100		100				40
BJ745-08125		125				45
BJ745-08160		160				55
BJ745-10050	M10×1.5	50	20	20	8.9	30
BJ745-10063		63	25	25		40
BJ745-10080		80	32	32		45
BJ745-10100		100	40	40		55
BJ745-10125		125				70
BJ745-10160		160				90
BJ745-10200		200				110
BJ745-12050	M12×1.75	50	20	20	10.7	40
BJ745-12063		63	25	25		50
BJ745-12080		80	32	32		65
BJ745-12100		100	40	40		80
BJ745-12125		125				100
BJ745-12160		160				125
BJ745-12200		200				160

型 号	M	L	L ₁	L ₂	D	质量 (g)		
BJ745-16063	M16×2	63	25	25	14.5	90		
BJ745-16080		80	32	32		125		
BJ745-16100		100	40	40		145		
BJ745-16125		125				180		
BJ745-16160		160	50	50		230		
BJ745-16200		200				290		
BJ745-16250		250	63	63		360		
BJ745-16315		315				450		
BJ745-16400		400				570		
BJ745-16500		500				710		
BJ745-20080		M20×2.5	80	32		32	18.3	180
BJ745-20100			100	40		40		230
BJ745-20125	125		280					
BJ745-20160	160		50	50	360			
BJ745-20200	200				460			
BJ745-20250	250		63	63	550			
BJ745-20315	315				690			
BJ745-20400	400				880			
BJ745-20500	500				1100			
BJ745-24100	M24×3		100	35	45	22		290
BJ745-24125			125		63			380
BJ745-24160			160		100			470
BJ745-24200		200	125		580			
BJ745-24250		250	160		730			
BJ745-24315		315	200		920			
BJ745-24400		400	250		1160			
BJ745-24500		500	315		1460			

使用示例及使用方法

